

Monier™ ROOFING

DATA SHEET

Premium Collection

CAMBRIDGE

A natural slate look tile created with a 'hewn stone' finish, Cambridge is a unique flat profile tile that complements both contemporary and classical house looks.

Cambridge tiles come standard with C-LOC™ Technology and Colour Through Technology.



PREMIUM C-LOC™ COLOUR TECHNOLOGY



STRENGTHENS OVER TIME



SUPERIOR THERMAL PERFORMANCE

Tile coverage (+/- 2%) Approx. 11 tiles/sqm

Dimensions (+/- 2%) Length: 420mm (415 in NSW)
Width: 329mm

Weight (+/- 2%) Per tile: 5.3kg
Per sqm: 58.3kg

Head lap adjustment (mm) 95-110


Recommended bonding Cross bond

Roof pitch


Minimum with sarking 15°[^]
Cambridge tiles must use sarking

Please refer to the Monier Construction Requirements at monier.com.au for installation requirements applicable to your project

[^] Minimum pitch for Cambridge in QLD is 18 degrees
Tile colour may vary from printed brochure.

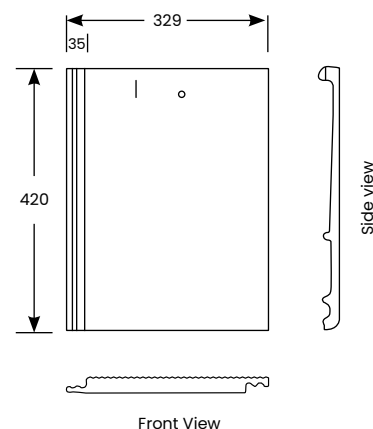

Cambridge colour range:



Soho Night




Find out more monier.com.au

CSR


CONCRETE ACCESSORIES

PARBARGE

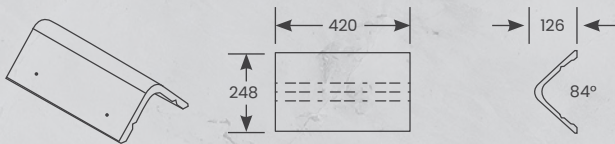


| Length (mm) | Width (mm) | Height (mm) | Angle (Degree) | Weight (kg) |
|-------------|------------|-------------|----------------|-------------|
| 420 | 248 | 126 | 84 | 4.9 |

RIDGE

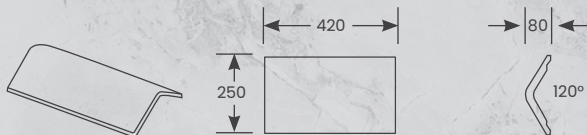


| Length (mm) | Width (mm) | Height (mm) | Angle (Degree) | Weight (kg) |
|-------------|------------|-------------|----------------|-------------|
| 420 | 250 | 80 | 120 | 3.4 |

3-WAY APEX

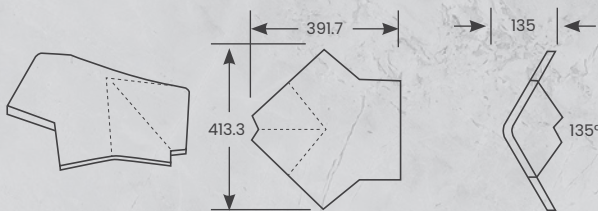

| Length (mm) | Width (mm) | Height (mm) | Angle (Degree) | Weight (kg) |
|-------------|------------|-------------|----------------|-------------|
| 391.7 | 413.3 | 135 | 135 | 3.8 |

STARTER

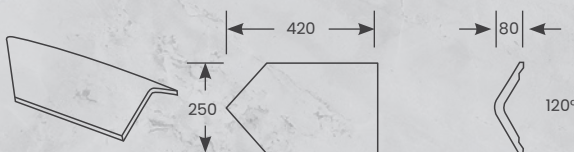

| Length (mm) | Width (mm) | Height (mm) | Angle (Degree) | Weight (kg) |
|-------------|------------|-------------|----------------|-------------|
| 420 | 250 | 80 | 120 | 2.8 |



Bradford Enviroseal HTS Vapour Permeable Roof Sarking

- Minimises risk of condensation damage to roof space
- Protects against wind driven rain entering the roof cavity
- High tensile scrim designed to endure tough installs

| Product Name | Width (mm) | Length (mm) | Per Roll (M²) | Product Code |
|----------------|------------|-------------|---------------|--------------|
| Enviroseal HTS | 1500 | 30 | 45 | 185381 |



Bradford Thermoseal™ Roof Tile Sarking

- Minimises wind driven rain entering the roof space
- Reflects 97% of radiant heat to keep the roof and home cool
- Tough and durable during installation

| Product Name | Width (mm) | Length (mm) | Per Roll (M²) | Product Code |
|---------------------------|------------|-------------|---------------|--------------|
| Thermoseal Roof Tile | 1500 | 30 | 45 | 15110 |
| Thermoseal Roof Tile Plus | 1500 | 30 | 45 | 27308 |



Flexible Pointing

- Features
- Easy to apply
 - Water clean-up
 - Available in 10L



Roofcoat™

- Features
- Water clean-up
 - Available in 10L & 20L
 - 10yr product warranty