

AiroMatic® **Continuous** Flow (CF)

POWERED ROOF VENTILATOR

AiroMatic CF is a high-performance ventilator that continuously removes heat and moisture from the roof space.

- **CONTINUOUS AIR EXCHANGE** It helps to control heat in summer and condensation risk in winter in the roof space.
- **CONDENSATION MANAGEMENT** Reduces the risk of condensation formation.
- **POWERFUL PERFORMANCE** Equivalent to 4 wind driven ventilators which reduces the number of roof penetrations

Product Specifications

| Materials: | UV stable clear acrylic dome & aluminium flashing |
|------------------|---|
| Throat Diameter: | 250mm |
| Product Weight: | 2.95kg |
| Applications: | Suitable for metal or tile roofs |
| Input Voltage: | 220 - 240VAC ~50/60Hz |
| Motor: | 24VDC |
| Flow rate: | 360 m³/hr at 0Pa |
| | |

*Up to 50m roof length. Refer to the PTS for Eave Vent requirements for longer roofs.



Detailed warranties, technical data sheets and installation instructions The COLORBOND steel colour swatches shown in this flyer have been reproduced available on website For more to represent actual product colours as accurately as possible. We recommend information, call 1300 858 674 checking your selection against an actual sample. COLORBOND®, BlueScope™and © Colour names are registered trademarks of BlueScope Steel Limited.



Complete a compliant roof ventilation system using 4 Eave **Vents per AiroMatic CF***

AiroMatic colour range:







Why Ventilate?

Effective ventilation is an important way to create a more comfortable, healthier and energy efficient home. Removing the heat in summer and managing moisture in winter helps to create a better living environment for your family.





Heat Reduction

Removes heat and replaces with outside air



Energy Efficient

Helps reduce the load on air conditioning



Moisture Management

Reduce the risk of moisture related damage to your home



NCC Compliance


Helps to meet NCC2022 cold climate ventilation requirements

Two tips to effectively ventilate your home

- There must be a path through which the air can be expelled, usually the ventilator.
- 2. There must be a path for replacement air to enter. Usually via eave, gable, subfloor or other static vents.

In summer, ventilation reduces heat in the roof space. While in winter, controls moisture and encourages fresh air.

Visit our website to find out more: bradfordventilation.com.au

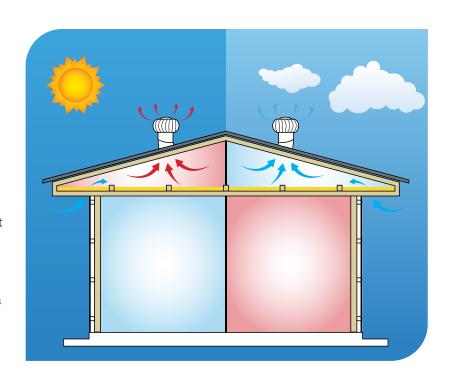

Bradford Ventilation is a business division of CSR Building Products Limited ABN 55 008 631 356.

The content of this flyer are copyright protected and may not be reproduced in any form without prior written consent of Bradford. Recommendations and advice regarding the use of the products described in this flyer are to be taken as a guide only and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the Bradford website for the latest revision of this document. The purchaser should independently determine the suitability of the product for the intended use and application.



