

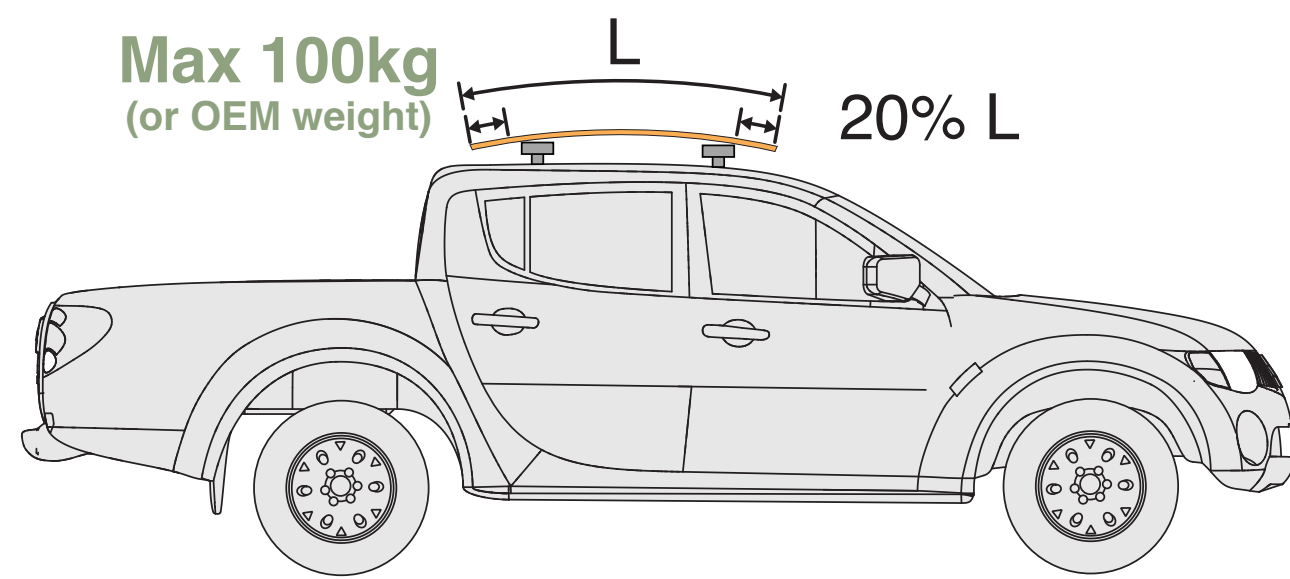


NON RIGID LOADS

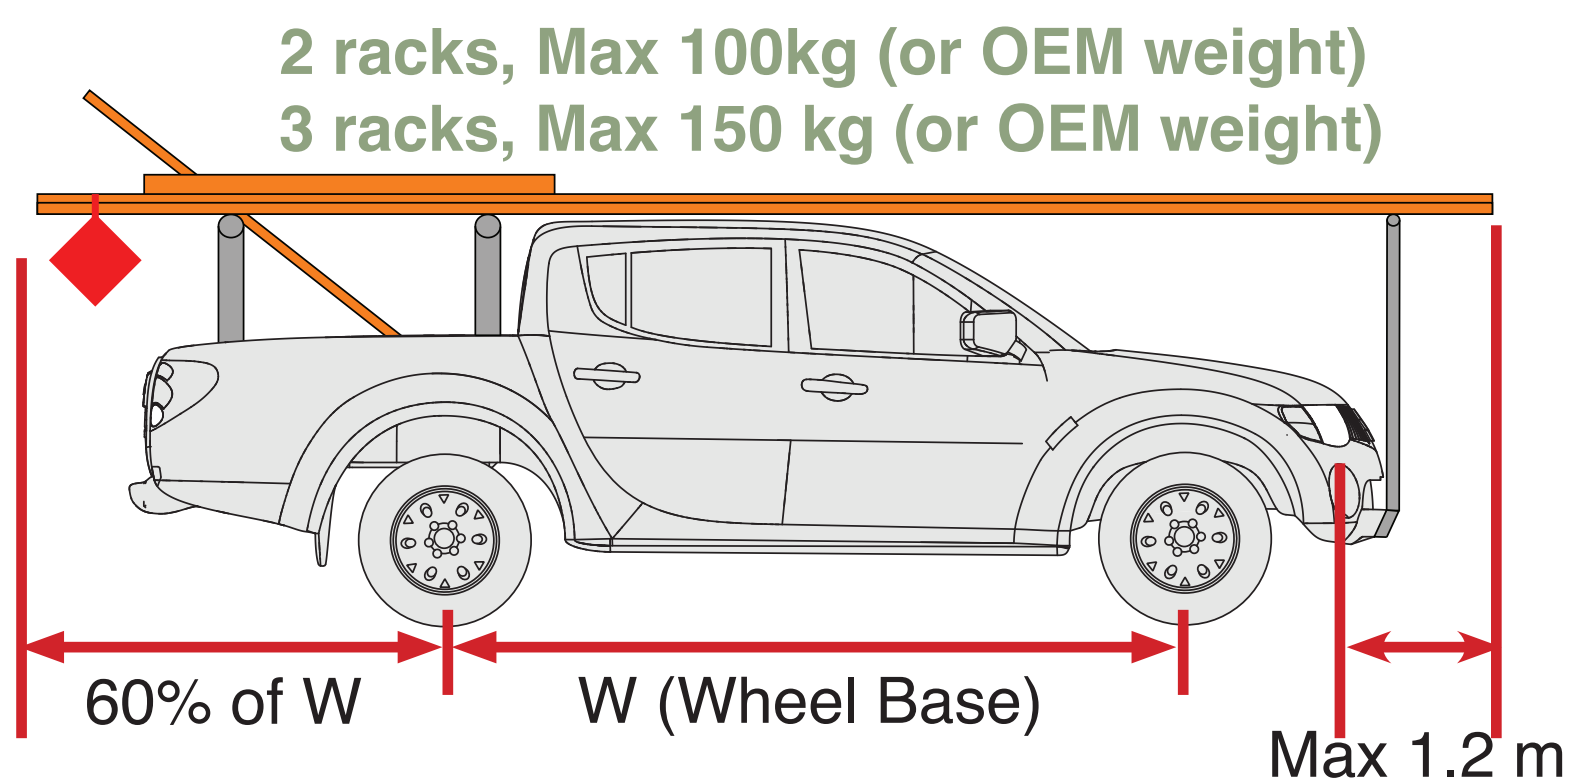

RIGID SELF SUPPORTING LOADS

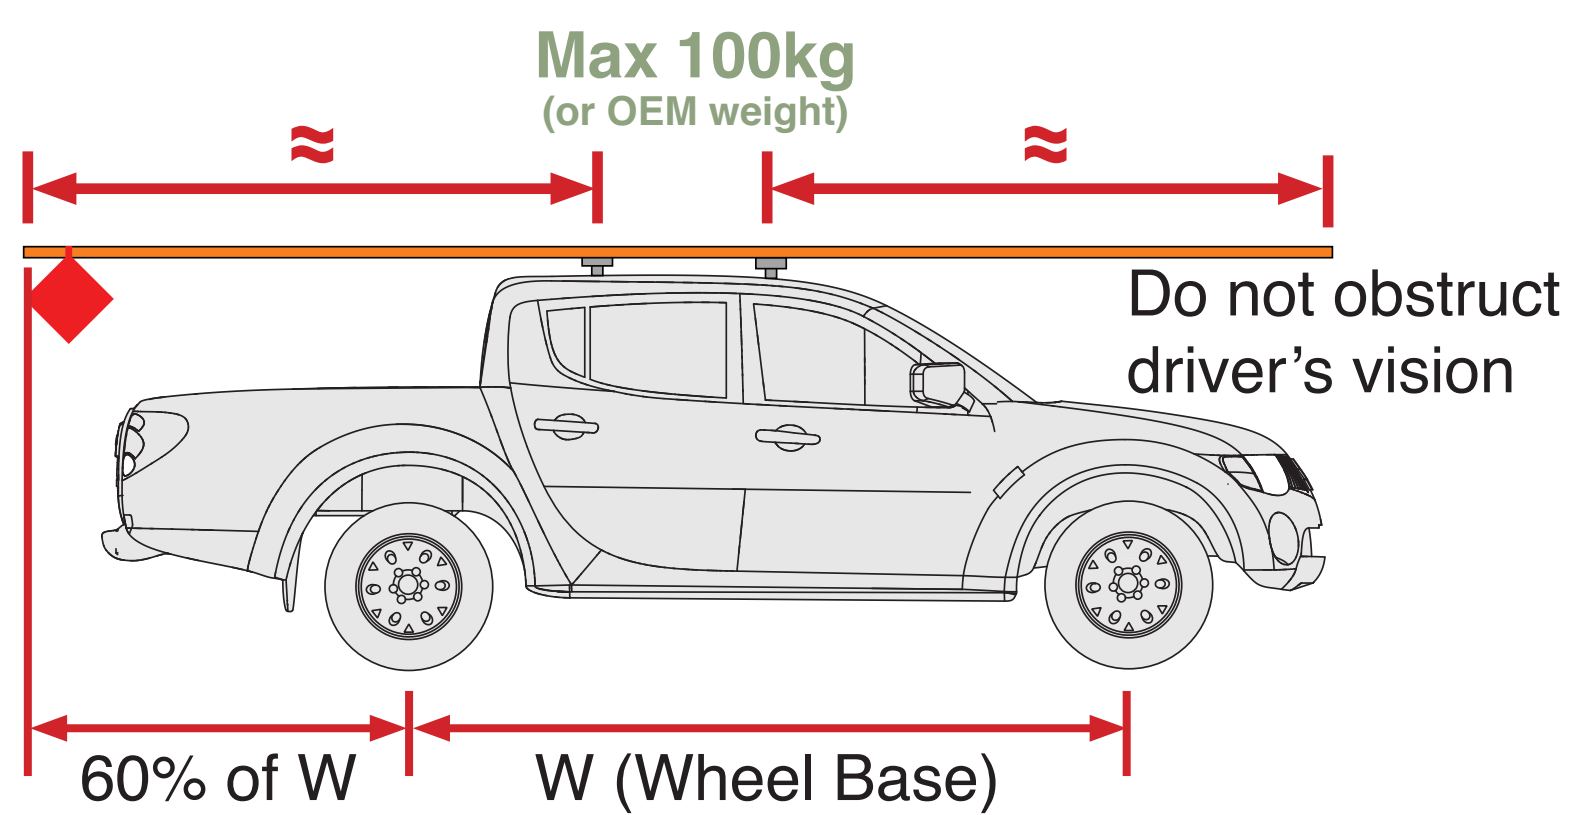


LOAD RESTRAINTS EQUIPMENT


Minimum 2 lashings!



Tape small quantities together and check items cannot be pulled out by hand (maximum 15kg).

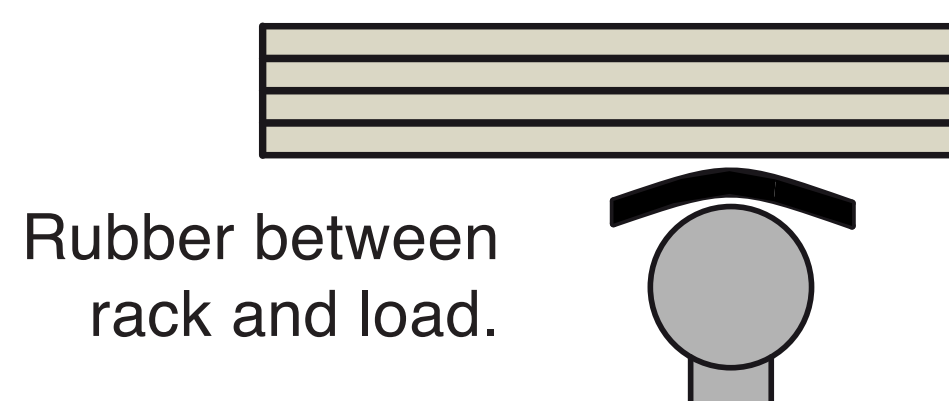


Rubber between rack and load.

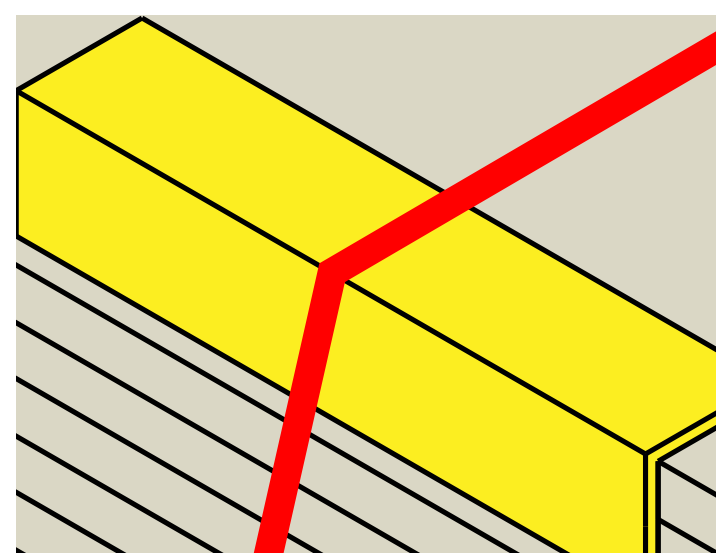



Use corners to protect product (lashings are to be fully tightened).

Use square timber (extend to the edge of the product for support).



Don't stack timber nor use rectangular timber on short edge.

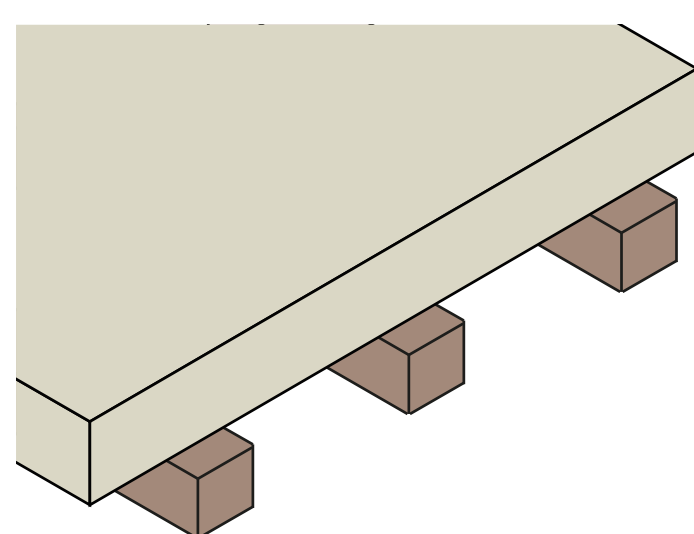


LOAD DIMENSION REQUIREMENTS – TRAILERS

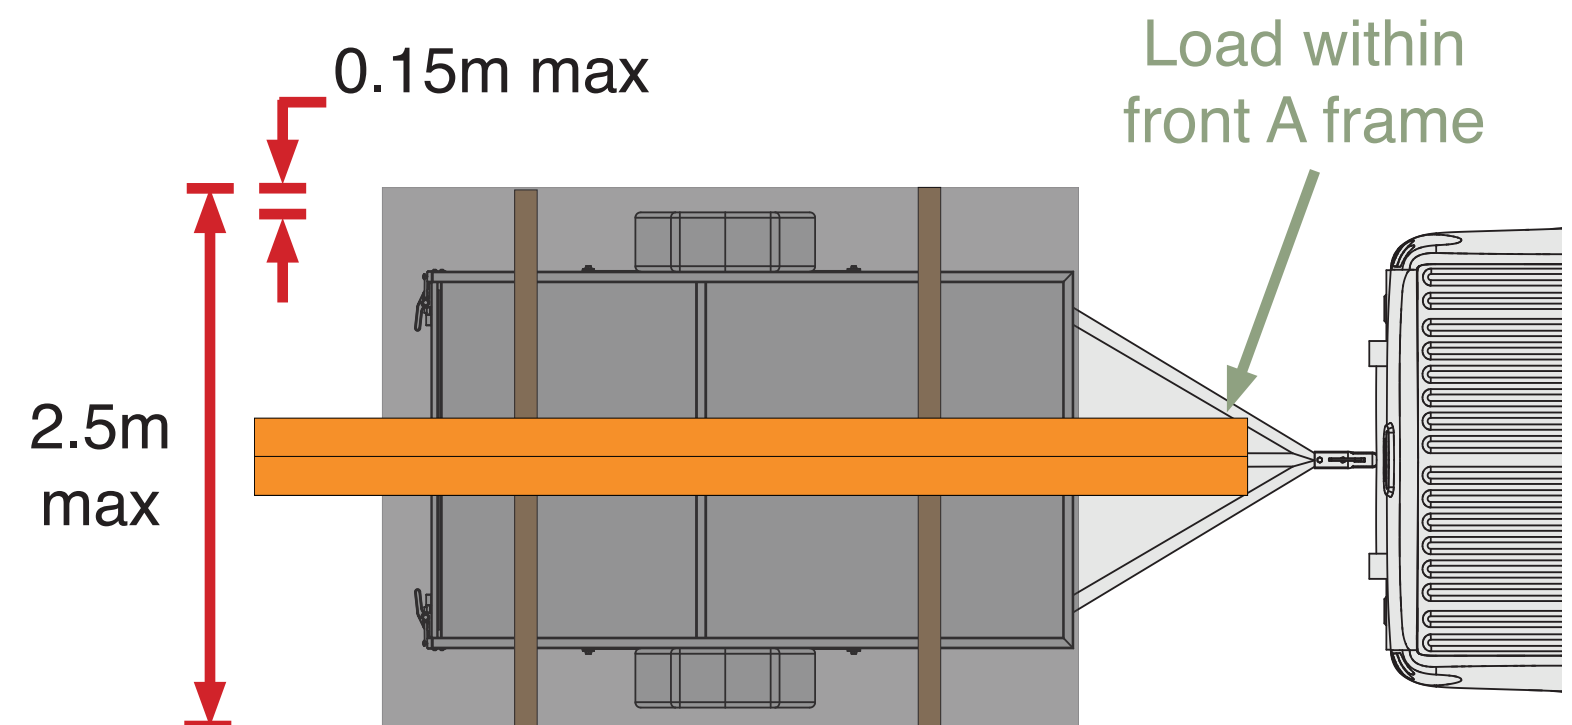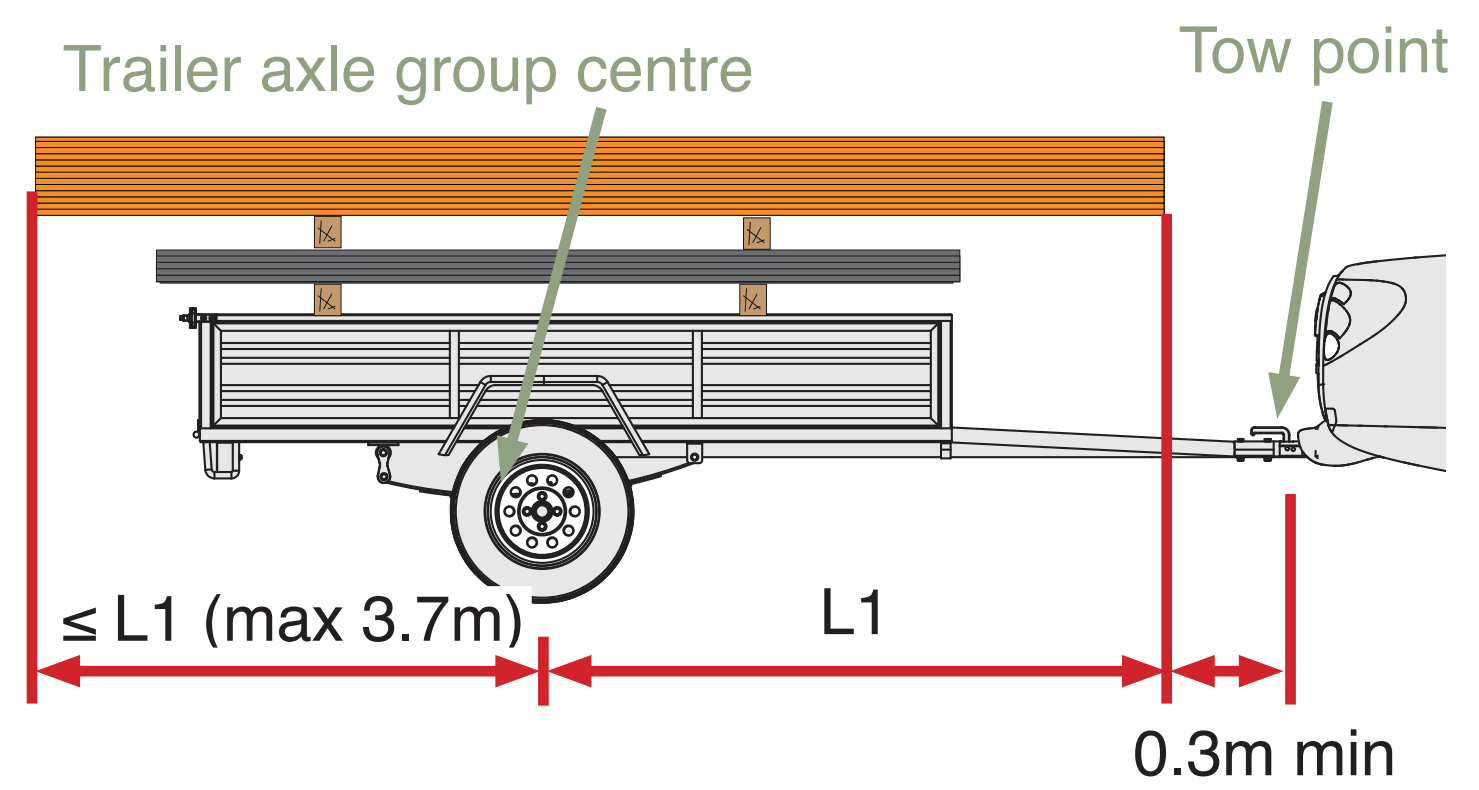

CONTAINMENT

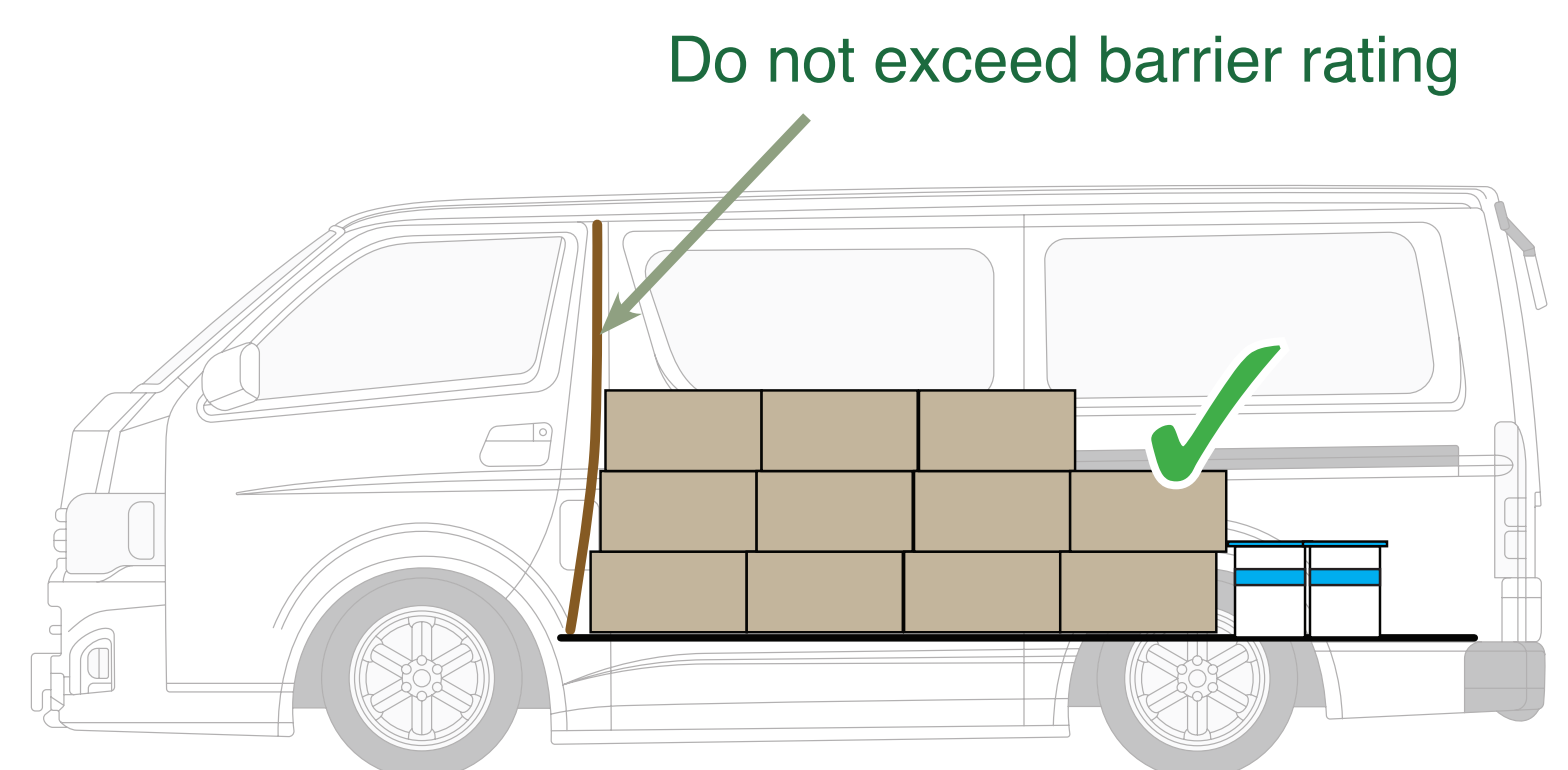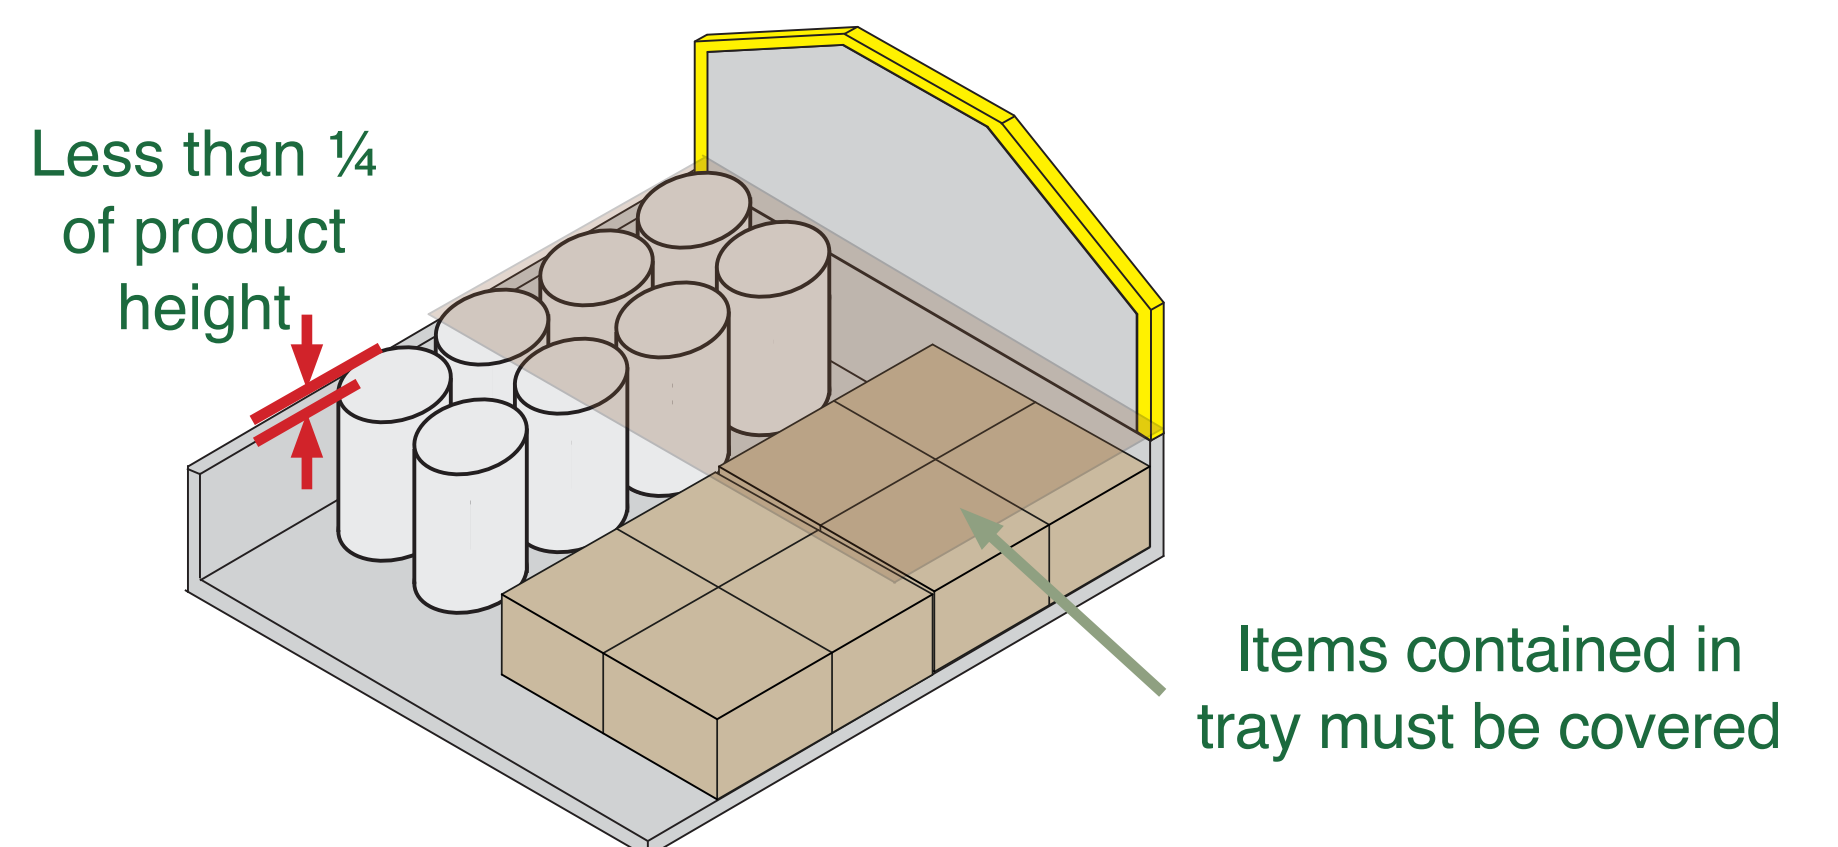

Distribute the load along the van, starting from the front

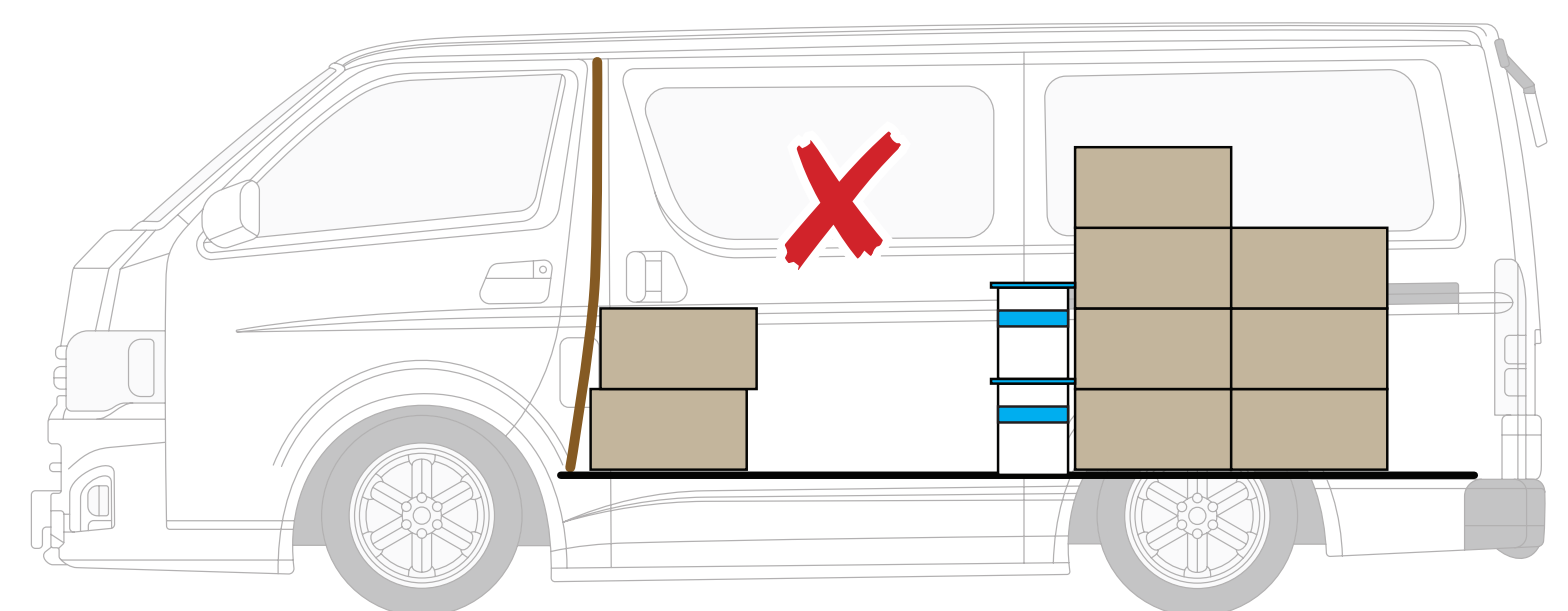

Don't leave gaps or have tall stacks that can slide or topple. Must not be stored in a compartment with passengers.

VEHICLES CONSIDERED INAPPROPRIATE CANNOT BE LOADED!

YOUR SAFETY IS OUR CONCERN

Refer to the *Load Restraint Guide for Light vehicle pick ups* (ELRC262) for more information.

The information presented is for guidance only and compliance with applicable laws and standards remains your responsibility.

ELRC262-P1-Rev1